


Introducing IEEE 802.11ac

The IEEE 802.11 family of standards, marketed under the Wi-Fi brand, has continued to offer users increasingly higher data rates since the late 1990. Published in December 2013, the 802.11ac amendment brought substantial improvements in data rates over its predecessor, 802.11n. The 802.11ac provides a maximum theoretical data throughput of 6.93 Gb/s using:

- ✓ Up to 8x8 multi-user multiple-input multiple-output (MU-MIMO)
- ✓ Larger channel bandwidths of 80 and 160 MHz
- ✓ Higher order quadrature amplitude modulation (QAM)

Breaking the gigabit barrier

Using channels of up to 160 MHz wide and higher order modulation increase the peak data rate for 802.11ac up to 866.7Mbps, or 333 percent over 802.11n for a single spatial stream (SS). Moreover, a wireless access point (AP) with dual antennas can support a peak data rate of 1.7Gbps. With eight antennas and 160Mhz channel, the total capacity can reach 6.93Gbps.

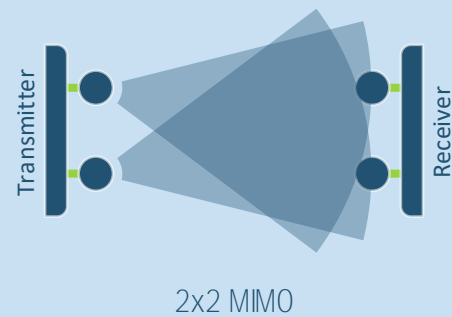


In a MIMO (Multi-input Multi-output) scheme, the transmitter divides a data stream among N transmitting antennas. The antennas receive these sub-streams as (multiple) input and broadcast them. The other end receives the transmissions using M antennas. The (multiple) outputs from all the M receiving antennas is combined to get the original data stream. The MIMO scheme improves the reliability and results in a higher link capacity. A single user MIMO (SU-MIMO) allows the AP to communicate with one user at a time.

MU-MIMO

802.11ac includes multi-user MIMO (MU-MIMO) modes, which allow simultaneous data transmissions to multiple devices. Up to four clients can receive simultaneous transmission from an AP. Each client may receive up to four SSs without exceeding the total number of eight SSs. MU-MIMO is downstream capability, upstream traffic from client proceed in half-duplex mode after normal avoidance mechanisms are employed.

802.11ac is backward compatible with 802.11a and 802.11n devices operating in the 5GHz band.

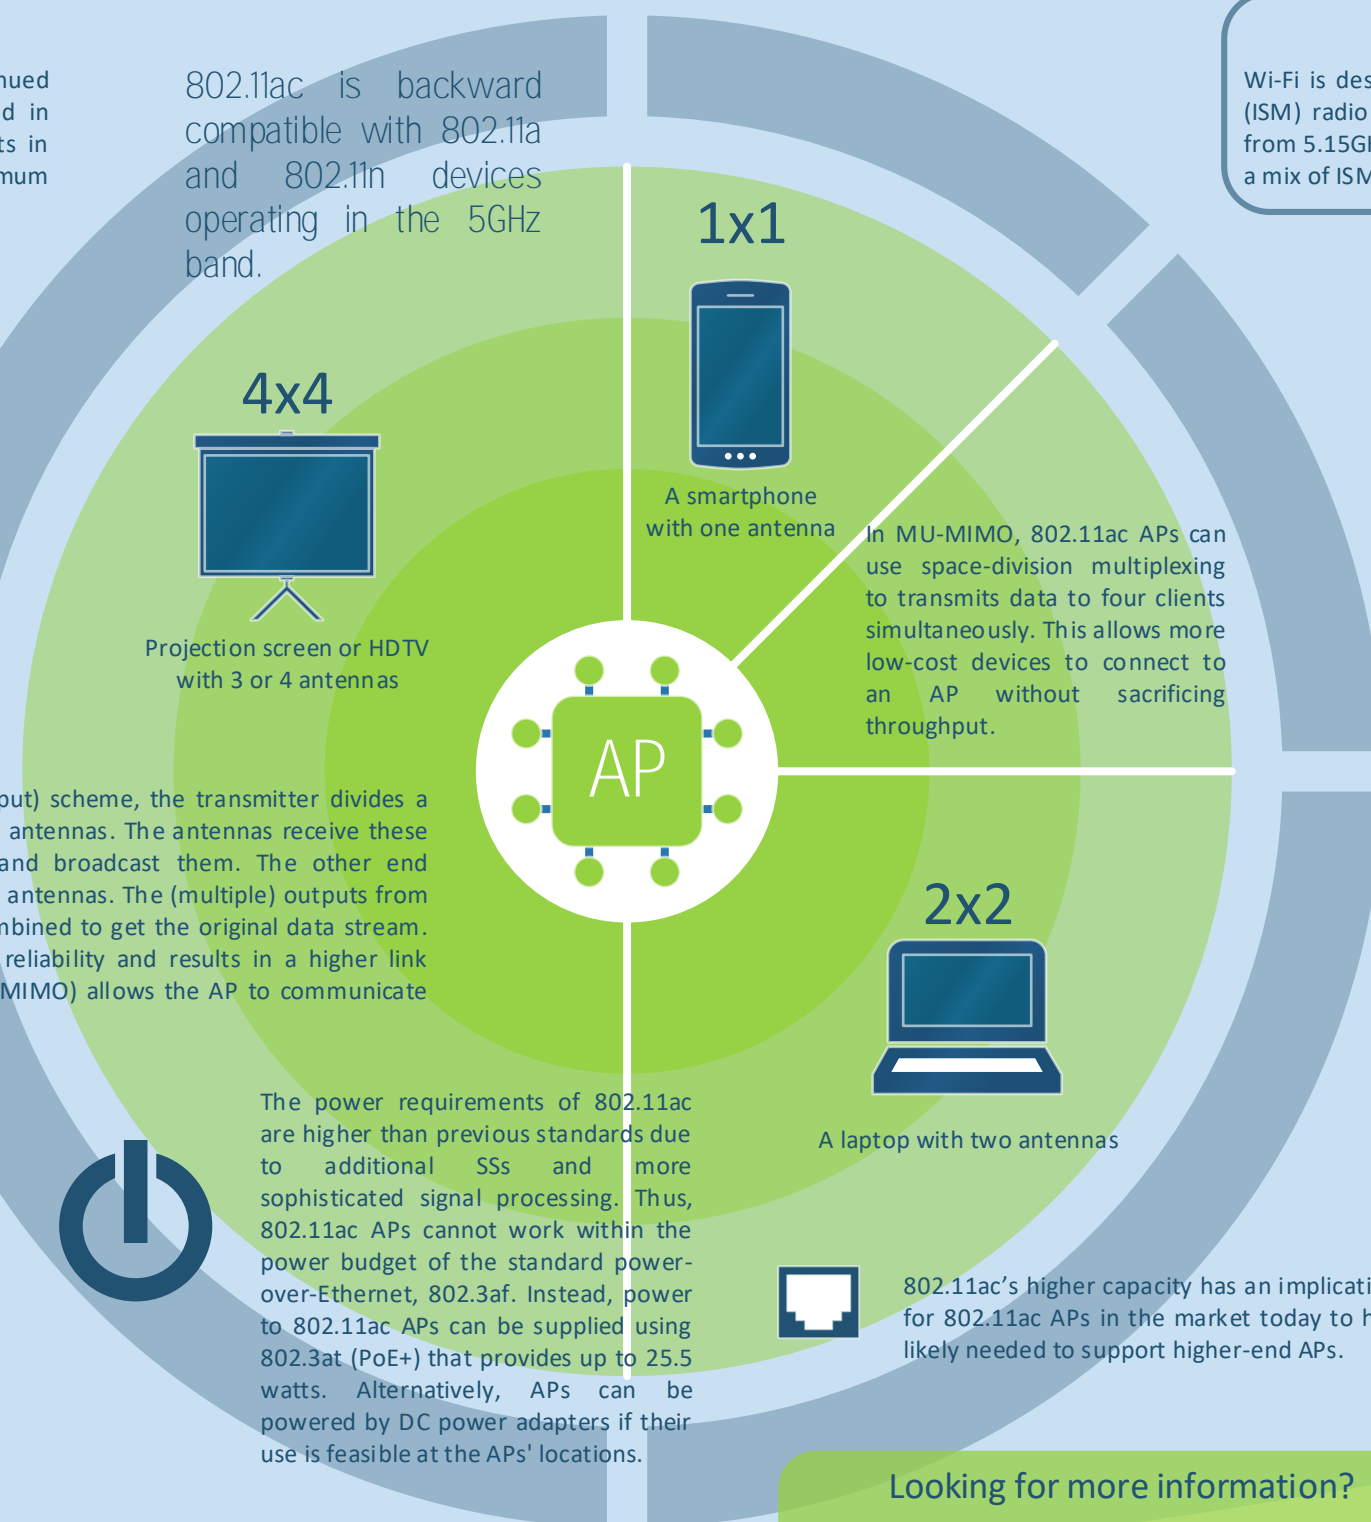

1x1



A smartphone with one antenna

In MU-MIMO, 802.11ac APs can use space-division multiplexing to transmits data to four clients simultaneously. This allows more low-cost devices to connect to an AP without sacrificing throughput.

4x4



Projection screen or HDTV with 3 or 4 antennas

2x2



A laptop with two antennas

The power requirements of 802.11ac are higher than previous standards due to additional SSs and more sophisticated signal processing. Thus, 802.11ac APs cannot work within the power budget of the standard power-over-Ethernet, 802.3af. Instead, power to 802.11ac APs can be supplied using 802.3at (PoE+) that provides up to 25.5 watts. Alternatively, APs can be powered by DC power adapters if their use is feasible at the APs' locations.



802.11ac's higher capacity has an implication also on the connectivity to the wired infrastructure. It is common for 802.11ac APs in the market today to have two 1Gbps ports. Also, multi-gigabit ports (2.5/5.0/10Gbps) are likely needed to support higher-end APs.

Operation in the 5GHz band

Wi-Fi is designed to operate in the unlicensed industrial, scientific and medical (ISM) radio bands around 2.4GHz and 5 GHz. 802.11ac utilizes the 5GHz band from 5.15GHz to 5.875GHz, exclusively. The radio bands available in the 5GHz are a mix of ISM and Unlicensed National Information Infrastructure (U-NII) bands.

Channel	Number (in US)	Data Rate (1SS)
20Mhz	24	86.7Mbps
40Mhz	11	200.0Mbps
80Mhz	5	433.3Mbps
160Mhz	2	866.7Mbps

The larger available spectrum in the 5GHz band provides more non-overlapping channels than the 2.4GHz band. In addition to the 20 and 40Mhz modes, IEEE 802.11ac also supports three new expanded channel bandwidth modes: 80, 160 and 80+80Mhz. The 80+80 mode combines two non-contiguous 80Mhz channels into one 160Mhz channel. As in the 2.4GHz band, each country has specific regulations that determine how much of these bands are made available.

Applications

Some of the goals of 802.11ac is to deliver higher levels of performance that enable applications such as:

- At home:
- ✓ Distribution of HDTV content throughout the house
 - ✓ Near instantaneous transfer of large files such as pictures
- At the enterprise:
- ✓ High-density connectivity environments
 - ✓ Real-time conferencing and video streaming
 - ✓ Backhaul traffic via point-to-point or mesh connectivity

Looking for more information?

Visit our website (<http://dynamiknets.com/2017/03/introducing-ieee-802-11ac>) for the list of references and other information.

DynamikNets Technology Solutions
e. info@dynamiknets.com
c. 902-240-8111
w. dynamiknets.com

